

SOLUTIONS FOR ENERGY SAVINGS


# AP ArmaFlex<sup>®</sup>

## Black and White Tube Insulation

The original, fiber-free, flexible elastomeric pipe insulation for reliable protection against condensation and energy loss.

- // Fiber-free, formaldehyde-free, low VOC and non-particulating formulation protects indoor air quality
- // Closed-cell structure provides excellent condensation control
- // Built-in vapor retarder eliminates need for additional vapor retarder
- // Rated 25/50 for use in return air plenums

[www.armacell.us](http://www.armacell.us)

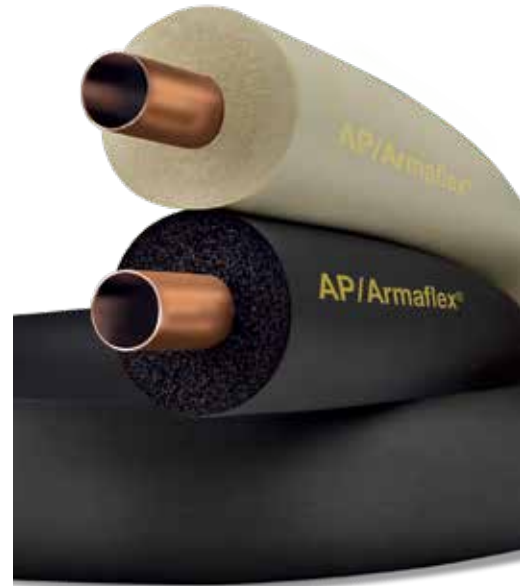

 **armacell**<sup>®</sup>  
ArmaFlex<sup>®</sup>

## TECHNICAL DATA – AP ArmaFlex® BLACK AND WHITE TUBE INSULATION

### Description

Black or off-white flexible closed-cell elastomeric thermal insulation in a tubular form

### Applications

Insulation for piping associated with HVAC, VRV and VRF systems, chillers, hot and cold water, refrigeration

### Specification Compliance

ASTM C 534, Type I – Grade 1	ASTM G21/C1338	MIL-P-15280J, FORM T ②	UL 94 5V-A, V-0, File E55798
ASTM D 1056, 2C1	CAN/ULC S102 ①	NFPA 90A, 90B	
ASTM E 84, UL723	City of New York Approval MEA 107-89M	UL 181	

### Approvals, Certifications, Compliances

- 3rd party certified by FM Approvals through 1-1/2" wall thickness per FM 4924
- GREENGUARD® Children & Schools Indoor Air Quality certified.
- Manufactured without CFCs, HFCs, HCFCs, PBDEs, or Formaldehyde.
- Made with EPA registered Microban® antimicrobial product protection.
- All Armacell facilities in North America are ISO 9001:2008 certified.
- Plenum Rated
- Conforms to ASHRAE 90.1 Energy Standards
- Conforms to building codes: International Mechanical Code, IMC, International Energy Conservation Code, IECC, International Residential Code, IRC, Title 24 California Building Energy Efficiency Standards.

### Typical Properties

Specifications	Values		Test Method
	3/8" through 1" Walls (NBR/PVC based)	1-1/2" and 2" Walls (EPDM based)	
<b>Thermal Conductivity:</b> Btu • in/h • ft <sup>2</sup> • °F (W/mK)			
50°F Mean Temperature (10°C)	0.235 (0.034)	0.278 (0.040)	ASTM C 177 or C 518
75°F Mean Temperature (24°C)	0.245 (0.0353)	0.28 (0.040)	
100°F Mean Temperature (38°C)	0.257 (0.037)	0.289 (0.041)	
125°F Mean Temperature (52°C)	0.268 (0.039)	0.300 (0.043)	
<b>Water Vapor Permeability:</b> Perm-in. [Kg/(s • m • Pa)]	0.05 (0.725 x 10 <sup>-13</sup> )	0.08 (1.16 x 10 <sup>-13</sup> )	ASTM E 96, Procedure A
<b>Flame Spread and Smoke Developed Index:</b>	25/50 rated	25/50 rated	ASTM E 84, UL 723 CAN/ULC S102 ①
<b>Water Absorption, % by Volume:</b>	0.2 %	0.2 %	ASTM C 209 or ASTM C1763
<b>Mold Growth:</b>	Passed	Passed	UL181
<b>Fungi Resistance:</b>			ASTM G21/C1338
<b>Maximum Service Temperature</b>	220°F (105°C) ③	300°F (149°C) ④	ASTM C534
<b>Minimum Service Temperature ⑤</b>	-297°F (-183°C) ⑥	-297°F (-183°C) ⑥	ASTM C534

### Sizes

Wall Thickness (nominal)	3/8", 1/2", 3/4", 1", 1-1/2", 2" (10, 13, 19, 25, 38, 50 mm)
Inside Diameter, Tubular	3/8" ID to 10" ID (10 mm ID to 250 mm ID)
Length of Sections, Feet, Tubular	6' (1.8 m) [Some larger sizes may be shipped in two 3' sections]

### Outdoor Use

Painting with WB Finish or other protective jacketing is required to prevent damage to the insulation in exterior applications and to comply with the insulation protection sections of the International Energy Conservation Code (IECC) and ASHRAE 90.1.

① AP ArmaFlex meets CAN/ULC S102 through 1" wall. AP ArmaFlex Black tested. AP ArmaFlex White determined to be comparable through 1" wall.

② AP ArmaFlex meets MIL-P-15280J through 1" wall.

③ AP ArmaFlex Pipe Insulation can withstand temperatures as high as 250°F for 96 hour time periods when tested according to ASTM C411 - Standard Test Method for Hot-Surface Performance of High-Temperature Thermal Insulation.

④ 1-1/2" and 2" AP ArmaFlex tubes are formulated with EPDM rubber giving them a higher upper use temperature than AP ArmaFlex tubes less than 1-1/2" wall thickness.

⑤ At temperatures below -20°F (-29°C), elastomeric insulation starts to become less flexible. However, this characteristic does not affect thermal efficiency and resistance to water vapor permeability of ArmaFlex insulation.

⑥ For applications of -40°F to -297°F (-40°C to -183°C), contact Armacell.



GREENGUARD Certified products are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit [ul.com/gg](http://ul.com/gg).

Microban antimicrobial product protection is limited to the product itself and is not designed to protect the users of these products from disease causing microorganisms, or as a substitute for normal cleaning and hygiene practices. Microban International, Ltd. makes neither direct nor implied health claims for the products containing Microban® antimicrobial product protection. Data, photomicrographs and information presented are based on standard laboratory tests and are provided for comparative purposes to substantiate antimicrobial activity for non-public health uses. Microban is a registered trademark of Microban International, Ltd.

## AP ArmaFlex BLACK TUBES - R VALUES

### 3/8" WALLS

IPAPT01438	3/16" Copper	2.8
IPAPT03838	1/4" Copper	2.8
IPPT01238	3/8" Copper	2.6
IPAPT05838	1/2" Copper	2.6
IPAPT03438	5/8" Copper	2.4
IPAPT07838	3/4" Copper	2.4
IPAPT11838	1" Copper	2.3
IPAPT13838	1-1/4" Copper	2.2
IPAPT15838	1-1/2" Copper	2.5
IPAPT11038	1-1/2" IPS	2.4
IPAPT21838	2" Copper	2.4
IPAPT20038	2" IPS	2.4
IPAPT25838	2-1/2" Copper	2.4
IPAPT21038	2-1/2" IPS	2.4
IPAPT31838	3" Copper	2.4
IPAPT30038	3" IPS	2.3

### 1/2" Walls

IPAPT01412	3/16" Copper	3.8
IPAPT03812	1/4" Copper	3.3
IPAPT01212	3/8" Copper	3.3
IPAPT05812	1/2" Copper	3.4
IPAPT03412	5/8" Copper	3.3
IPAPT07812	3/4" Copper	3.3
IPAPT11812	1" Copper	3.3
IPAPT13812	1-1/4" Copper	3.2
IPAPT15812	1-1/2" Copper	3.2
IPAPT11012	1-1/2" IPS	3.1
IPAPT21812	2" Copper	3.2
IPAPT20012	2" IPS	3.2
IPAPT25812	2-1/2" Copper	3.2
IPAPT21012	2-1/2" IPS	3.2
IPAPT31812	3" Copper	3.2
IPAPT30012	3" IPS	3.1
IPAPT35812	3-1/2" Copper	3.1
IPAPT41812R	4" Copper	3.1
IPAPT40012R	4" IPS	3.0
IPAPT50012R	5" IPS	3.0
IPAPT60012R	6" IPS	3.0
IPAPT80012R	8" IPS	2.9

### 3/4" WALLS

IPAPT01434	3/16" Copper	6.4
IPAPT03834	1/4" Copper	5.9
IPAPT01234	3/8" Copper	5.5
IPAPT05834	1/2" Copper	5.6
IPAPT03434	5/8" Copper	5.5
IPAPT07834	3/4" Copper	5.4
IPAPT11834	1" Copper	5.4
IPAPT13834	1-1/4" Copper	5.3
IPAPT15834	1-1/2" Copper	5.1
IPAPT11034	1-1/2" IPS	4.9
IPAPT21834	2" Copper	4.8
IPAPT20034	2" IPS	5.2
IPAPT25834	2-1/2" Copper	4.7
IPAPT21034	2-1/2" IPS	5.0
IPAPT31834	3" Copper	4.6
IPAPT30034	3" IPS	4.9

### 3/4" WALLS (continued)

IPAPT35834	3-1/2" Copper	4.5
IPAPT41834R	4" Copper	4.5
IPAPT40034R	4" IPS	4.8
IPAPT50034R	5" IPS	4.7
IPAPT60034R	6" IPS	4.6
IPAPT80034R	8" IPS	4.5

### 1" WALLS

IPAPT01410	3/16" Copper	2.8
IPAPT03810	1/4" Copper	7.3
IPAPT01210	3/8" Copper	7.2
IPAPT05810	1/2" Copper	7.2
IPAPT03410	5/8" Copper	7.0
IPAPT07810	3/4" Copper	7.0
IPAPT11810	1" Copper	7.2
IPAPT13810	1-1/4" Copper	7.2
IPAPT15810	1-1/2" Copper	7.2
IPAPT11010	1-1/2" IPS	6.9
IPAPT21810	2" Copper	6.8
IPAPT20010	2" IPS	7.1
IPAPT25810	2-1/2" Copper	6.5
IPAPT21010	2-1/2" IPS	6.8
IPAPT31810	3" Copper	6.3
IPAPT30010	3" IPS	6.6
IPAPT35810	3-1/2" Copper	6.2
IPAPT41810R	4" Copper	6.1
IPAPT40010R	4" IPS	6.4
IPAPT50010R	5" IPS	6.2
IPAPT60010R	6" IPS	6.1
IPAPT80010R	8" IPS	5.9
IPAPT10010R	10" IPS	5.8

### 1-1/2" WALLS

IPAPT03815	1/4" Copper	13.7
IPAPT01215	3/8" Copper	12.7
IPAPT05815	1/2" Copper	12.0
IPAPT03415	5/8" Copper	11.3
IPAPT07815	3/4" Copper	10.8
IPAPT11815	1" Copper	10.1
IPAPT13815	1-1/4" Copper	9.6
IPAPT15815	1-1/2" Copper	9.2
IPAPT11015	1-1/2" IPS	8.7
IPAPT21815	2" Copper	8.6
IPAPT20015	2" IPS	8.8
IPAPT25815	2-1/2" Copper	8.2
IPAPT21015	2-1/2" IPS	8.4
IPAPT31815	3" Copper	7.9
IPAPT30015	3" IPS	8.1
IPAPT35815	3-1/2" Copper	7.7
IPAPT41815R	4" Copper	7.5
IPAPT40015R	4" IPS	7.8
IPAPT50015R	5" IPS	7.5
IPAPT61815R	6" Copper	7.4
IPAPT60015R	6" IPS	7.3
IPAPT80015R	8" IPS	7.0
IPAPT10015R	10" IPS	6.8

### 2" WALLS

IPAPT03820	1/4" Copper	19.7
IPAPT01220	3/8" Copper	18.2
IPAPT05820	1/2" Copper	17.2
IPAPT03420	5/8" Copper	16.2
IPAPT07820	3/4" Copper	15.5
IPAPT11820	1" Copper	14.5
IPAPT13820	1-1/4" Copper	13.7
IPAPT15820	1-1/2" Copper	13.1
IPAPT11020	1-1/2" IPS	12.4
IPAPT21820	2" Copper	12.2
IPAPT20020	2" IPS	12.3
IPAPT25820	2-1/2" Copper	11.6
IPAPT21020	2-1/2" IPS	11.7
IPAPT31820	3" Copper	11.1
IPAPT30020	3" IPS	11.2
IPAPT35820	3-1/2" Copper	10.7
IPAPT41820R	4" Copper	10.5
IPAPT40020R	4" IPS	10.7
IPAPT50020R	5" IPS	10.2
IPAPT60020R	6" IPS	9.9
IPAPT80020R	8" IPS	9.5
IPAPT10020R	10" IPS	9.2

\*These specifications are based on the measurement methods employed by Armacell. Other methods may not result in the same values and cannot be used to determine if the product is within the given tolerance.

## AP ArmaFlex WHITE TUBES - R VALUES

### 1/2" Walls

IPWTT03812	1/4" Copper	3.3
IPWTT01212	3/8" Copper	3.3
IPWTT05812	1/2" Copper	3.4
IPWTT03412	5/8" Copper	3.3
IPWTT07812	3/4" Copper	3.3
IPWTT11812	1" Copper	3.3
IPWTT13812	1-1/4" Copper	3.2
IPWTT15812	1-1/2" Copper	3.2
IPWTT11012	1-1/2" IPS	3.1
IPWTT21812	2" Copper	3.2
IPWTT20012	2" IPS	3.5
IPWTT25812	2-1/2" Copper	3.4
IPWTT21012	2-1/2" IPS	3.4
IPWTT31812	3" Copper	3.3

### 3/4" WALLS

IPWTT03834	1/4" Copper	5.9
IPWTT01234	3/8" Copper	5.5
IPWTT05834	1/2" Copper	5.7
IPWTT03434	5/8" Copper	5.5
IPWTT07834	3/4" Copper	5.5
IPWTT11834	1" Copper	5.5
IPWTT13834	1-1/4" Copper	5.4
IPWTT15834	1-1/2" Copper	5.2
IPWTT11034	1-1/2" IPS	5.0
IPWTT21834	2" Copper	4.9
IPWTT20034	2" IPS	4.9
IPWTT25834	2-1/2" Copper	4.8
IPWTT21034	2-1/2" IPS	4.8
IPWTT31834	3" Copper	4.7
IPWTT30034	3" IPS	4.6
IPWTT35834	3-1/2" Copper	4.6
IPWTT41834R	4" Copper	4.5

### 1" WALLS

IPWTT03810	1/4" Copper	10.2
IPWTT01210	3/8" Copper	9.5
IPWTT05810	1/2" Copper	9.1
IPWTT03410	5/8" Copper	8.6
IPWTT07810	3/4" Copper	8.3
IPWTT11810	1" Copper	7.7
IPWTT13810	1-1/4" Copper	7.4
IPWTT15810	1-1/2" Copper	7.3
IPWTT11010	1-1/2" IPS	7.0
IPWTT21810	2" Copper	6.9
IPWTT25810	2-1/2" Copper	6.6
IPWTT31810	3" Copper	6.4
IPWTT35810	3-1/2" Copper	6.3

### 1-1/2" WALLS

IPWTT03815	1/4" Copper	13.7
IPWTT01215	3/8" Copper	12.7
IPWTT05815	1/2" Copper	12.0
IPWTT03415	5/8" Copper	11.4
IPWTT07815	3/4" Copper	10.9
IPWTT11815	1" Copper	10.2
IPWTT13815	1-1/4" Copper	9.7
IPWTT15815	1-1/2" Copper	9.3
IPWTT11015	1-1/2" IPS	8.9
IPWTT21815	2" Copper	8.7
IPWTT20015	2" IPS	8.5
IPWTT25815	2-1/2" Copper	8.3
IPWTT21015	2-1/2" IPS	8.1
IPWTT31815	3" Copper	8.0
IPWTT30015	3" IPS	7.8
IPWTT35815	3-1/2" Copper	7.8
IPWTT41815R	4" Copper	7.6
IPWTT40015R	4" IPS	7.4
IPWTT50015R	5" IPS	7.2
IPWTT60015R	6" IPS	7.0

### 2" WALLS

IPWTT03820	1/4" Copper	19.7
IPWTT01220	3/8" Copper	18.2
IPWTT05820	1/2" Copper	17.3
IPWTT03420	5/8" Copper	16.3
IPWTT07820	3/4" Copper	15.7
IPWTT11820	1" Copper	14.6
IPWTT13820	1-1/4" Copper	13.8
IPWTT15820	1-1/2" Copper	13.2
IPWTT21820	2" Copper	12.3
IPWTT20020	2" IPS	12.0
IPWTT25820	2-1/2" Copper	11.7
IPWTT31820	3" Copper	11.2
IPWTT30020	3" IPS	10.9
IPWTT35820	3-1/2" Copper	10.8
IPWTT41820R	4" Copper	10.5
IPWTT40020R	4" IPS	10.3
IPWTT50020R	5" IPS	9.9
IPWTT60020R	6" IPS	9.6

\*These specifications are based on the measurement methods employed by Armacell. Other methods may not result in the same values and cannot be used to determine if the product is within the given tolerance.

All data and technical information are based on results achieved under typical application conditions. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. By ordering/receiving product you accept the **Armacell General Terms and Conditions of Sale** applicable in the region. Please request a copy if you have not received these.

© Armacell, 2020. AP ArmaFlex is a trademark of the Armacell Group

AP ArmaFlex | Tube TDS | 032020 | NAI EN-A | 017

# ABOUT ARMACELL

As the inventors of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal, acoustic and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency making a difference around the world every day. With 3,100 employees and 24 production plants in 16 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for high-tech and lightweight applications and next generation aerogel blanket technology.

For more information, please visit:  
[www.armacell.us](http://www.armacell.us)  
 800-866-5638

