

## TECHNICAL INFO

Style 750 is designed for preparing high temperature removable pads, flange and valve covers. Style 750 is a fiberglass fabric impregnated with a high temperature, flame retardant, silicone rubber that provides greater life and improved resistance to abrasion, flexing, tear and puncture. The base fabric meets MIL-C-20079.

### Base Fabric

**Weight:** 12.6 ± .4 oz./sq. yd.

**Gauge:** .0135 ± .002.

**Count W & F:** 4 harness satin.

**Width:** 60".

### Specifications

**Weight:** 17.0 oz./sq. yd. nominal.

**Thickness:** .018" nominal.


**Tensile Strength:** 350 lb./in. avg. warp., 300 lb./in. avg. fill.

**Trapezoidal Tear Strength:** Too high to measure.

**Upper Use Temperature:** 500°F.

**Color:** Silver aluminum.

**Width:** 60" nominal.

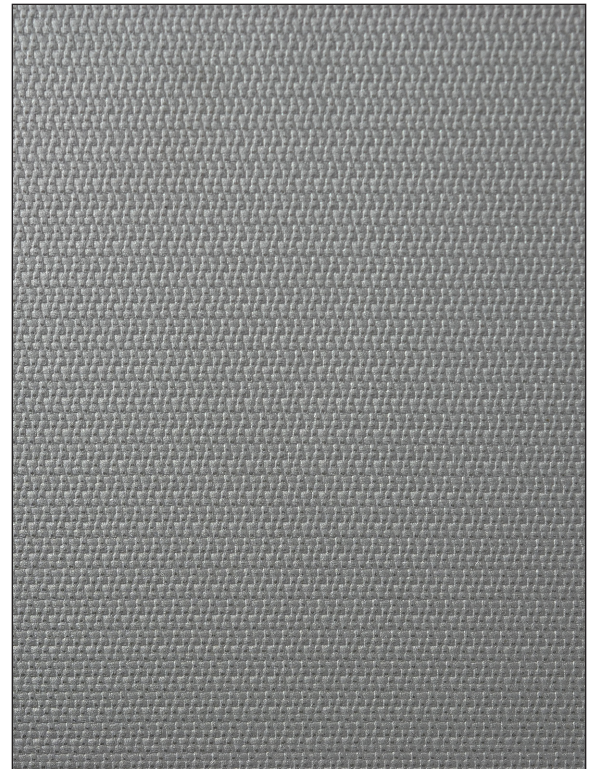

All statements herein are expressions of opinion which we believe to be accurate and reliable but are not intended as recommendations for their use in the infringement of any patent. No patent warranty of any kind, express or implied is made or intended.

For more information on GLT Products, please call toll-free at 800.874.1748 or online at [www.gltproducts.com](http://www.gltproducts.com).



Innovative Insulation Systems

#### HEADQUARTERS:

6810 Cochran Road | Solon OH 44139 | 440.914.1122 | 440.914.1133 Fax | **1.800.874.1748**

#### DISTRIBUTION CENTERS:

**Ohio:** 6810 Cochran Road | Solon OH 44139 | 440.914.1122

**North Carolina:** 501 West Camel Street | Greensboro, NC 27401 | 1.800.551.9760

**California:** 4283 Pock Lane #200 | Stockton, CA 95206 | 1.800.833.4500

**Texas:** 8905 Market Street | Houston, TX 77029 | 1.800.874.1748