



TECHNICAL INFO

Silica fabric is a flexible fabric developed to replace asbestos fabric in welding and stress relieving applications where protection against heat or molten metal is necessary.

- Base material meets Military Spec MIL-Y-1140 and MIL-I-24244.
- **Style 84** is used where special protection is required from welding sparks when fire and light burning is required.
- **Style 188** is used where more durability is needed during heavy burning or stress relieving.
- These products are also available as rope, sleeving, woven tape and slit tape.

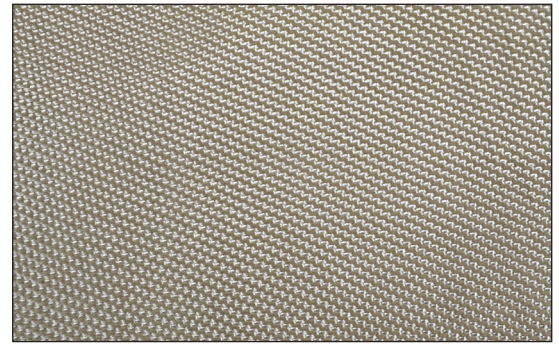

18 oz. shown

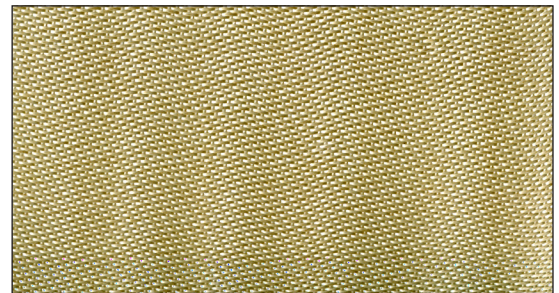

36 oz. shown

Specifications:

	Style 84	Style 188
Weight	18 oz sq. yd	36 oz. sq. yd
Width	36" and 60"	36"
Thickness	.030	.054"
Base Fabric	Silica - Minimum 96% - No Asbestos	
Weave	Satin 8 harness	
Color	Natural fabric color	
Temperature Resistance	1800°F continuous 2300°F intermittent 3000°F melting temperature	

For more information on GLT Products, please visit us online at www.gltproducts.com or call toll-free at **1-800-874-1748**.



HEADQUARTERS:

6810 Cochran Road | Solon OH 44139 | 440.914.1122 | 440.914.1133 Fax | **1.800.874.1748**

DISTRIBUTION CENTERS:

Ohio: 6810 Cochran Road | Solon OH 44139 | 440.914.1122
Texas: 2902 East 13th Street | Houston, TX 77571 | 713-670-9700
North Carolina: 109 Sands Road, Reidsville | Reidsville, NC 27320 | 1.800.551.9760
California: 4113 Gold River Lane | Stockton, CA 95215 | 1.800.833.4500