


# SeaRox® SL 328<sup>NA</sup>

SeaRox® SL 328<sup>NA</sup> is a semi rigid mineral wool (stone wool) insulation board designed for acoustical applications in marine installations. Common application areas for SeaRox® SL 328<sup>NA</sup> are living quarters and sound dampening of technical installations on board.

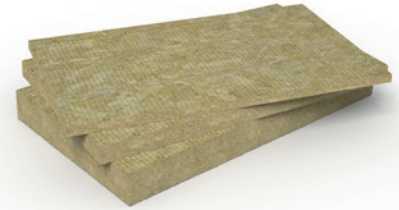

## Product properties in accordance with ASTM C612

Properties	Performance			Norms	
Thermal conductivity	$T_m$ (°F)	25	75	100	ASTM C177
	$\lambda$ (BTU.in/hr.ft <sup>2</sup> .°F)	0.22	0.25	0.26	
	$T_m$ (°C)	-4	25	38	
	$\lambda$ (W/mK)	0.032	0.036	0.038	
Maximum Service Temperature	Hot Surface Performance: 1200°F- (650°C) Non-Combustible Linear Shrinkage: ≤ 1 % at 1200°F- (650°C)			ASTM C411 ASTM E136 / CAN4 S114 ASTM C356	
Reaction to fire	Surface burning characteristics Flame spread index = 0 ; Smoke development index = 0			ASTM E84 (UL 723) CAN/ULC S102	
Density	Actual Density = 4 lb/ft <sup>3</sup> - (64 kg/m <sup>3</sup> )			ASTM C303	
Corrosion resistance**	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel = Passed Corrosion of Steel = Passed			ASTM C692 ASTM C665	
Chemical Analysis**	(Salts: Cl <sup>-</sup> , F <sup>-</sup> , Na <sup>+</sup> , SiO <sub>4</sub> <sup>4-</sup> ) Results fall within acceptability limits of ASTM C795			ASTM C795 / ASTM C871	
Thermal Resistance	R-Value / inch @ 75°F RSI value / 25.4mm @ 24°C	4.1 hr. ft <sup>2</sup> .°F/BTU 0.72 m <sup>2</sup> K/W		ASTM C518 (C177)	
Water Absorption/ Vapor Sorption	< 1 % Weight			ASTM C1104/1104M	
Compliance	Complies with Type: IVA			ASTM C612	
Acoustical performance (at 2" thickness)	NRC rating 1			ASTM C423	

ROCKWOOL Technical Insulation offers a wide range of facings, dimensions and thicknesses. Please contact us for further information.

\*\* Provisions for lot testing may be required, consult manufacturer.

Approval Type	US Coast Guard Certificate of Approval	Transport Canada Certificate of Approval	Lloyds Register Certificate of Approval
Non-Combustibility	164.109/26/0	LRTC 0000063	SAS F150087
Marine Foil Facing	164.112/142/0		

Surface Burning Characteristics: UL Listed to Canadian standard CAN/ULC S102 ; UL Classified to UL 723



As ROXUL® Inc has no control over installation design and workmanship, accessory materials or application conditions, ROXUL® Inc. does not warrant the performance or results of any installation containing ROXUL® Inc's products. ROXUL® Inc's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.

®/TM: US - owner ROCKWOOL International A/S used under license; Canada - owner Roxul Inc.